

QUIKCOUP® BRANCH OUTLET



99



08T



08G




88

Style 08



Quik-T™

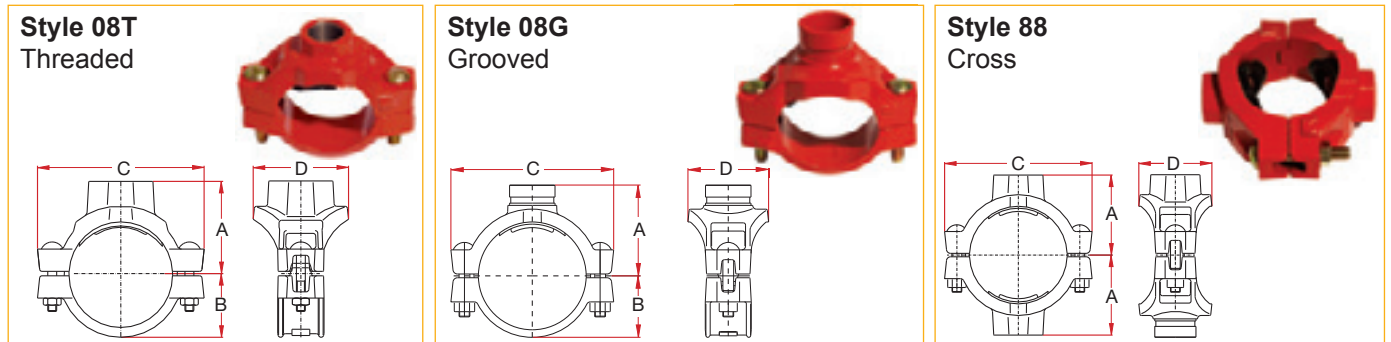

	Nominal Size Run x Outlet	Pipe Outside Diam.	Outlet		Quik-T Dimensions				HOLE DIA. Tol. +1/8 + 3.2	Bolts			Weight Kg.				
			Size	Type #	A		B	C		D	No.	Size		x Length			
					Thd.	Grv.											
inch	2 X 50	1/2	2.375	1/2	T	2 9/32	-	1 45/64	5 5/16	3	1 1/2	2	M10	x	57	1.00	
mm		15	60.3			58.0		43.0	135.0	76.0	38.1						
inch			3/4	2.375	3/4	T	2 9/32	-	1 45/64	5 5/16	3	1 1/2	2	M10	x	57	1.15
mm		20	60.3			58.0		43.0	135.0	76.0	38.1						
inch			1	2.375	1	T	2 37/64	-	1 45/64	5 5/16	3	1 1/2	2	M10	x	57	1.30
mm		25	60.3			65.5		43.0	135.0	76.0	38.1						
inch			1 1/4	2.375	1 1/4	T,G	2 3/4	3 1/64	1 45/64	5 5/16	3 15/64	1 3/4	2	M10	x	57	1.50
mm		32	60.3	42.4		69.5	76.5	43.0	135.0	82.0	44.5						
inch		1 1/2	2.375	1 1/2	T,G	2 3/4	3 1/64	1 45/64	5 5/16	3 15/64	1 3/4	2	M10	x	57	1.50	
mm	40	60.3	48.3		69.5	76.5	43.0	135.0	82.0	44.5							
inch	3 O.D. X 65	1/2	3.000	1/2	T	2 41/64	-	1 57/64	5 29/32	3 5/8	1 1/2	2	M12	x	76	1.60	
mm		15	76.1			67.0		48.0	150.0	92.0	38.1						
inch			3/4	3.000	3/4	T	2 23/32	-	1 57/64	5 29/32	3 5/8	1 1/2	2	M12	x	76	1.70
mm		20	76.1			69.0		48.0	150.0	92.0	38.1						
inch			1	3.000	1	T	2 27/32	-	1 57/64	5 29/32	3 5/8	1 1/2	2	M12	x	76	1.90
mm		25	76.1			72.0		48.0	150.0	92.0	38.1						
inch			1 1/4	3.000	1 1/4	T,G	3	3 1/4	1 57/64	5 29/32	3 5/8	2	2	M12	x	76	1.82
mm		32	76.1	42.4		76.0	82.0	48.0	150.0	92.0	50.8						
inch		1 1/2	3.000	1 1/2	T,G	3	3 1/4	1 57/64	5 29/32	3 5/8	2	2	M12	x	76	1.82	
mm	40	76.1	48.3		76.0	82.0	48.0	150.0	92.0	50.8							
inch	3 X 80	1/2	3.500	1/2	T	2 25/32	-	2 7/32	6 3/16	3 3/4	1 1/2	2	M12	x	76	2.10	
mm		15	88.9			70.5		56.5	160.0	80.0	38.1						
inch			3/4	3.500	3/4	T	2 31/32	-	2 7/32	6 3/16	3 3/4	1 1/2	2	M12	x	76	2.20
mm		20	88.9			75.5		56.5	160.0	80.0	38.1						
inch			1	3.500	1	T	3 1/32	-	2 7/32	6 3/16	3 3/4	1 1/2	2	M12	x	76	1.95
mm		25	88.9			77.0		56.5	160.0	80.0	38.1						
inch			1 1/4	3.500	1 1/4	T,G	3 27/64	3 23/32	2 7/32	6 3/16	3 3/4	2	2	M12	x	76	2.33
mm		32	88.9	42.4		87.0	94.5	56.5	160.0	95.0	50.8						
inch		1 1/2	3.500	1 1/2	T,G	3 27/64	3 23/32	2 7/32	6 3/16	3 3/4	2	2	M12	x	76	2.33	
mm	40	88.9	48.3		87.0	94.5	56.5	160.0	95.0	50.8							
inch		2	3.500	2	T,G	3 35/64	3 41/64	2 7/32	6 3/16	4 1/8	2 1/2	2	M12	x	76	2.45	
mm	50	88.9	60.3		90.0	92.5	56.5	160.0	105.0	63.5							
inch	4 1/4 O.D. X 100	1 1/2	4.250	1 1/2	T	4 1/64	-	2 19/32	7 1/8	3 25/32	2	2	M12	x	76	2.23	
mm		40	108.0			102.0		66.0	181.0	96.0	50.8						
inch	4 X 100	1/2	4.500	1/2	T	3 23/32	-	2 5/8	7 3/8	3 25/32	1 1/2	2	M12	x	76	1.95	
mm		15	114.3			87.0		69.0	187.0	96.0	38.1						
inch			3/4	4.500	3/4	T	3 23/32	-	2 5/8	7 3/8	3 25/32	1 1/2	2	M12	x	76	2.00
mm		20	114.3			89.0		69.0	187.0	96.0	38.1						
inch			1	4.500	1	T	3 3/8	-	2 5/8	7 3/8	3 25/32	1 1/2	2	M12	x	76	2.10
mm		25	114.3			92.0		69.0	187.0	96.0	38.1						
inch			1 1/4	4.500	1 1/4	T,G	4 3/32	4 3/32	2 5/8	7 3/8	3 25/32	2	2	M12	x	76	2.27
mm		32	114.3	42.4		104.0	104.0	69.0	187.0	96.0	50.8						
inch			1 1/2	4.500	1 1/2	T,G	4 3/32	4 3/32	2 5/8	7 3/8	3 25/32	2	2	M12	x	76	2.37
mm		40	114.3	48.3		104.0	104.0	69.0	187.0	96.0	50.8						
inch			2	4.500	2	T,G	4 3/32	4 3/32	2 5/8	7 3/8	4 7/32	2 1/2	2	M12	x	76	2.51
mm		50	114.3	60.3		104.0	104.0	69.0	187.0	107.0	63.5						
inch		2 1/2	4.500	2 1/2	T,G	4 13/32	4 3/32	2 5/8	7 3/8	4 1/4	2 3/4	2	M12	x	76	2.70	
mm	65	114.3	76.1		112.0	104.0	69.0	187.0	108.0	69.8							
inch		3	4.500	3	T,G	4 13/32	4 7/16	2 5/8	7 3/8	5 1/8	3 1/2	2	M12	x	76	3.40	
mm	80	114.3	88.9		112.0	113.0	69.0	187.0	130.0	88.9							

Table continues on next page