




Style 64M, 65M, 66M, 05M, 06M



Grooved End Fittings

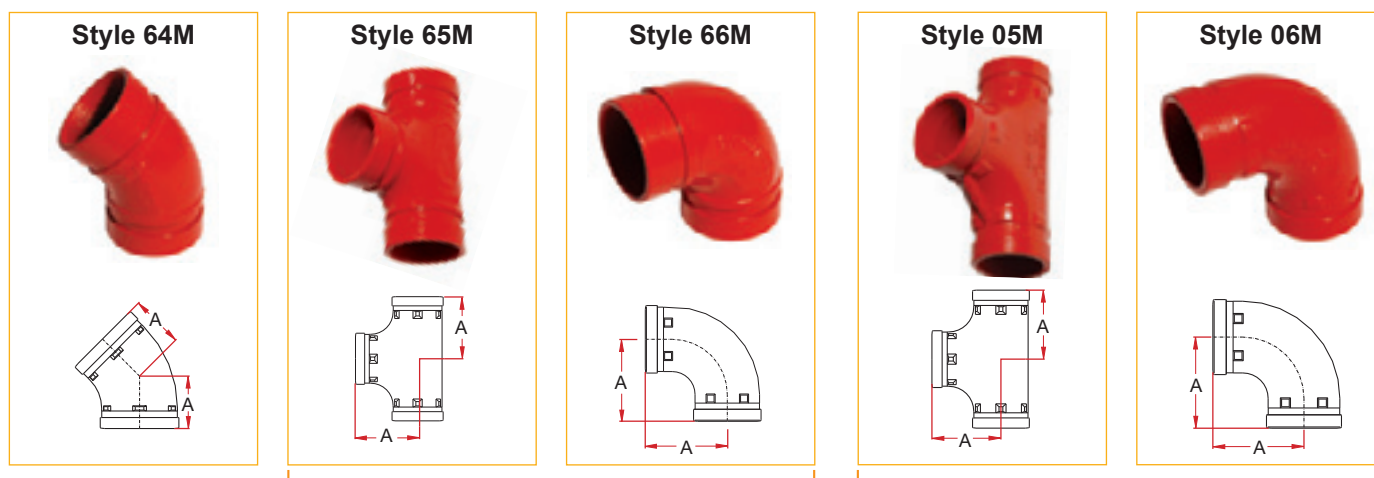

Short Radius

Standard Radius

Features

- QUIKCOUP® GROOVED END FITTINGS has been specially designed for flexible installation with need for further preparation in the field. All fittings feature ready-made grooves, making for easy and flexible alignment.

	Nominal Size	Pipe Outside Diam.	Style 64M Elbow 45°		Style 65M Tee		Style 66M Elbow 90°		Style 05M Tee		Style 06M Elbow 90°	
			A	Weight Kg	A	Weight Kg	A	Weight Kg	A	Weight Kg	A	Weight Kg
inch	1	1.315	-	-	2 1/4	0.36	2 1/4	0.25	-	-	-	-
mm	25	33.4	-	-	57	0.36	57	0.25	-	-	-	-
inch	1 1/4	1.660	1 47/64	0.34	2 3/4	0.68	2 3/4	0.45	-	-	-	-
mm	32	42.4	44.0	0.34	70.0	0.68	70.0	0.45	-	-	-	-
inch	1 1/2	1.900	1 47/64	0.40	2 3/4	0.80	2 3/4	0.54	-	-	-	-
mm	40	48.3	44.0	0.40	70.0	0.80	70.0	0.54	-	-	-	-
inch	2	2.375	2	0.64	2 3/4	0.88	2 3/4	0.62	3 1/4	1.44	3 1/4	0.93
mm	50	60.3	51.0	0.64	70.0	0.88	70.0	0.62	82.6	1.44	82.6	0.93
inch	2 1/2	2.875	-	-	-	-	-	-	3 3/4	2.00	3 3/4	1.35
mm	65	73.0	-	-	-	-	-	-	95.3	2.00	95.3	1.35
inch	3 O.D.	3.000	2 1/4	0.93	3	1.42	3	1.02	3 3/4	2.38	3 3/4	1.36
mm	65	76.1	57.0	0.93	76.0	1.42	76.0	1.02	95.3	2.38	95.3	1.36
inch	3	3.500	2 1/2	1.34	3 3/8	2.08	3 3/8	1.50	4 1/4	3.09	4 1/4	1.90
mm	80	88.9	63.5	1.34	85.5	2.08	85.5	1.50	108.0	3.09	108.0	1.90
inch	4 1/4 O.D.	4.250	-	-	3 31/32	3.37	3 31/32	2.43	5	5.03	5	2.50
mm	100	108.0	-	-	101.0	3.37	101.0	2.43	127.0	5.03	127.0	2.50
inch	4	4.500	3	2.44	3 31/32	3.24	3 31/32	2.35	5	5.27	5	2.58
mm	100	114.3	76.0	2.44	101.0	3.24	101.0	2.35	127.0	5.27	127.0	2.58
inch	5 1/4 O.D.	5.250	3 1/4	3.66	-	-	-	-	5 1/2	6.00	5 1/2	4.50
mm	125	133.0	82.5	3.66	-	-	-	-	139.7	6.00	139.7	4.50
inch	5 1/2 O.D.	5.500	3 1/4	3.10	4 7/8	5.60	4 7/8	4.26	5 1/2	6.50	5 1/2	5.06
mm	125	139.7	82.5	3.10	124.0	5.60	124.0	4.26	139.7	6.50	139.7	5.06
inch	5	5.563	-	-	-	-	-	-	-	-	-	-
mm	125	141.3	-	-	-	-	-	-	-	-	-	-
inch	6 1/4 O.D.	6.250	3 1/2	4.62	5 1/2	7.40	5 1/2	5.30	6 1/2	11.0	6 1/2	7.20
mm	150	159.0	89.0	4.62	140.0	7.40	140.0	5.30	165.1	11.0	165.1	7.20
inch	6 1/2 O.D.	6.500	3 1/2	5.14	5 1/2	7.50	5 1/2	5.36	6 1/2	12.13	6 1/2	8.45
mm	150	165.1	89.0	5.14	140.0	7.50	140.0	5.36	165.1	12.13	165.1	8.45
inch	6	6.625	3 1/2	5.35	5 1/2	8.64	5 1/2	6.41	6 1/2	12.86	6 1/2	8.72
mm	150	168.3	89.0	5.35	140.0	8.64	140.0	6.41	165.1	12.86	165.1	8.72
inch	8	8.625	4 1/4	9.33	6 7/8	14.45	6 7/8	10.60	7 3/4	23.06	7 3/4	15.05
mm	200	219.1	108.0	9.33	175.0	14.45	175.0	10.60	196.9	23.06	196.9	15.05
inch	10	10.750	4 23/32	15.94	-	-	-	-	9	35.0	9	26.2
mm	250	273.0	120.0	15.94	-	-	-	-	229.0	35.0	229.0	26.2
inch	12	12.750	5 1/4	23.61	-	-	-	-	10	59.0	10	35.0
mm	300	323.9	133.0	23.61	-	-	-	-	254.0	59.0	254.0	35.0

Maximum working pressure: 1000 psi (69 bar)