



99



08T



08G




88

Style 99



QuikLet™

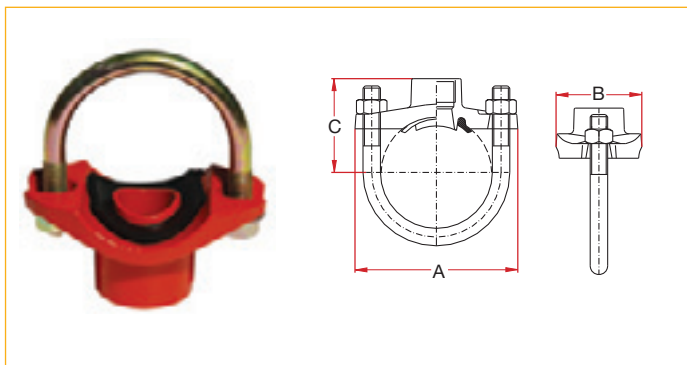

Features

- QUIKLET™ Products are designed for quick and easy direct connection of sprinkler heads in wet and dry automatic sprinkler systems.
- Suitable for use on standard and lightwall branch steel pipes in grid or loop piping systems.
- For general use (other than sprinkler systems) max. working pressure 20 bar.

	Nominal size		Pipe Outside Diam.	Outlet	Quiklet Dimensions (mm)			Weight Kg	
	Run	x Outlet			A	B	C		
inch	1¼" 32 mm	x	½	1.660	½	91.0	58.0	43.0	0.34
mm			15	42.4					
inch			¾	1.660	¾	91.0	58.0	50.0	0.37
mm			20	42.4					
inch	1½" 40 mm	x	1	1.660	1	91.0	58.0	56.0	0.44
mm			25	42.4					
inch			½	1.900	½	91.0	58.0	44.0	0.34
mm			15	48.3					
inch	2" 50 mm	x	¾	1.900	¾	91.0	58.0	51.0	0.37
mm			20	48.3					
inch			1	1.900	1	91.0	58.0	57.0	0.44
mm			25	48.3					
inch	3" O.D. 65 mm	x	½	2.375	½	96.5	58.0	50.5	0.40
mm			15	60.3					
inch			¾	2.375	¾	96.5	58.0	57.5	0.45
mm			20	60.3					
inch	3" O.D. 65 mm	x	1	2.375	1	96.5	58.0	63.5	0.49
mm			25	60.3					
inch			½	3.000	½	112.0	59.0	63.5	0.55
mm			15	76.1					
inch	¾	3.000	¾	112.0	59.0	64.5	0.60		
mm	20	76.1							
inch	3" O.D. 65 mm	x	1	3.000	1	112.0	59.0	72.5	0.65
mm			25	76.1					

► Note:
Hole diameters 30mm (1¼").

½" and ¾" outlets are NPT or BSP threaded.
1" outlets are BSP threaded.