




## Style 02, 41, 42, 91



### Grooved End Fittings

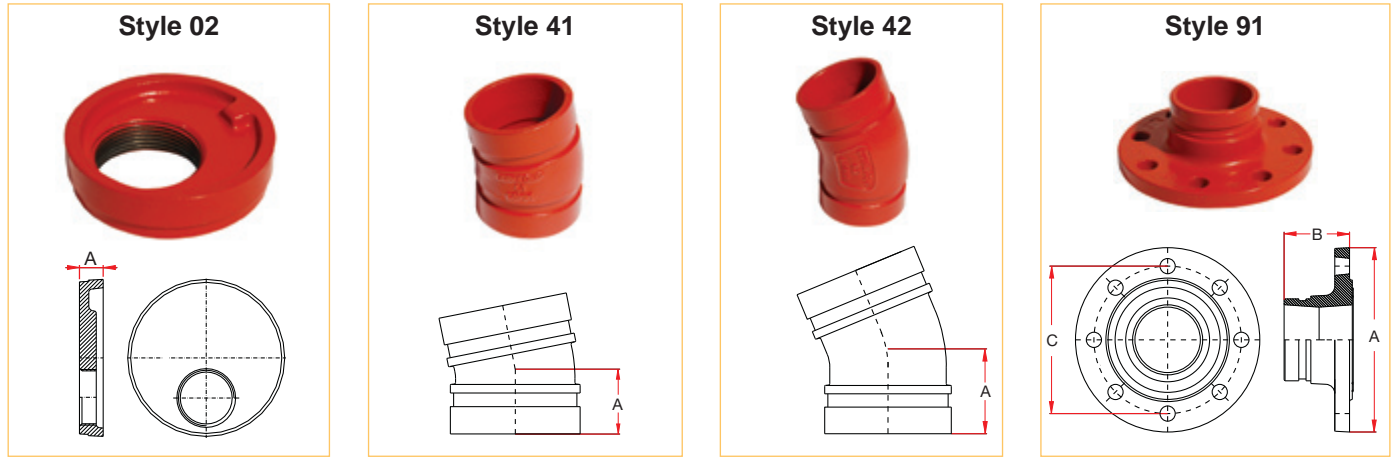

	Nominal Size	Pipe Outside Diam.	*Style 02 or 02-D End-Cap		Style 41 Elbow 11¼		Style 42 Elbow 22½		Style 91 Flange Adaptor					
			A		A	Weight Kg	A	Weight Kg	A	B	C	Bolts No.	Bolts Size	Weight Kg
inch	1¼	1.660	29/32	0.13	1⅞	0.21	125/32	0.270	-	-	-	-	-	-
mm	32	42.4	23.0		35.0		45.0							
inch	1½	1.900	29/32	0.17	1⅞	0.25	125/32	0.330	-	-	-	-	-	-
mm	40	48.3	23.0		35.0		45.0							
inch	2	2.375	29/32	0.28	1⅞	0.34	17/8	0.460	6½	229/64	459/64	4	M16	-
mm	50	60.3	23.0		35.0		48.0		165.0	62.0	125.0			
inch	3 O.D.	3.000	61/64	0.42	1½	0.60	2	0.800	73/32	241/64	523/32	4	M16	-
mm	65	76.1	24.0		38.0		51.0		185.0	67.0	145.0			
inch	3	3.500	61/64	0.55	1½	0.79	2¼	1.200	77/8	229/64	619/64	8	M16	3.78
mm	80	88.9	24.0		38.0		57.0		200.0	62.0	160.0			
inch	3	3.500	-	-	-	-	-	-	71/8	229/64	6	8	M16	3.78
mm	80	88.9							200.0	62.0	152.0			
inch	4¼ O.D.	4.250	1	0.78	-	-	-	-	821/32	227/32	73/32	8	M16	4.95
mm	100	108.0	25.4						220.0	72.0	180.0			
inch	4	4.500	1	0.95	147/64	1.36	27/8	2.140	821/32	241/64	73/32	8	M16	5.70
mm	100	114.3	25.4		44.0		73.0		200.0	67.0	180.0			
inch	5¼ O.D.	5.250	1	1.26	-	-	-	-	-	-	-	-	-	-
mm	125	133.0	25.4											
inch	5½ O.D.	5.500	1	1.45	2	1.82	3⅞	2.605	927/32	241/64	5½	8	M16	7.90
mm	125	139.7	25.4		51.0		79.0		250.0	67.0	210.0			
inch	6¼ O.D.	6.250	1	1.85	2	2.40	3⅞	3.740	-	-	-	-	-	-
mm	150	159.0	25.4		51.0		79.0							
inch	6½ O.D.	6.500	1	2.15	2	2.17	3⅞	3.378	117/64	241/64	929/64	8	M20	9.66
mm	150	165.1	25.4		51.0		79.0		282.0	67.0	240.0			
inch	6	6.625	1	2.21	2	2.87	3⅞	4.468	117/32	241/64	929/64	8	M20	10.10
mm	150	168.3	25.4		51.0		79.0		285.0	67.0	240.0			
inch	8	8.625	1 3/16	3.89	2	4.32	37/64	8.335	13 ½	4 ¼	11 5/8	12	M20	17.60
mm	200	219.1	30.2		51.0		98.0		343.0	108.0	295.0			
inch	8	8.625	-	-	-	-	-	-	13 ½	4 ¼	11 5/8	8	M20	-
mm	200	219.1							343.0	108.0	295.0			
inch	10	10.750	1¼	7.33	-	-	-	-	1535/64	53/64	1325/32	12	M20	33.70
mm	250	273.0	32.0						395.0	132.0	350.0			
inch	10	10.750	-	-	-	-	-	-	1563/64	53/64	1363/64	12	M24	-
mm	250	273.0							406.0	132.0	355.0			
inch	12	12.750	1¼	10.19	-	-	-	-	18 1/8	311/32	163/64	12	M24	-
mm	300	323.9	32.0						460.0	85.0	410.0			
inch	14	14.000	1¼	18.0	-	-	-	-	-	-	-	-	-	-
mm	350	355.6	@32.0											
inch	16	16.000	1¼	22.0	-	-	-	-	-	-	-	-	-	-
mm	400	406.4	@32.0											

Maximum working pressure: 1000 psi (69 bar)  
Style 02-D available with 1½ & 2" drains